

September 11, 2017

Dear Sir:

Attached is Addendum No. 1 dated September 11, 2017 to the Specifications for The Manitoba Water Services Board Contract No. M.W.S.B. 1398, Prairie View Municipality, Town of Birtle, Contract 1: Raw Water Pipeline. Please verify receipt of this Addendum for our records by fax to (204) 726-6290.



**ACKNOWLEDGEMENT OF RECEIPT OF ALL ADDENDUMS
MUST BE INCLUDED IN THE TENDER SUBMISSION.**

Failure to include acknowledgement shall cause the tender to be rejected. If Tender is submitted before Addendum is issued, the Board will accept a faxed acknowledgement prior to the tender closing.

Yours truly,

R. Lytle
Construction Manager

The Manitoba Water Services Board
Unit #1A - 2010 Currie Blvd.
Brandon, MB R7B 4E7

Dear Sir:

We have received Addendum No. 1 dated September 11, 2017 to the Specifications for The Manitoba Water Services Board Contract No. M.W.S.B. 1398, Prairie View Municipality, Town of Birtle, Contract 1: Raw Water Pipeline.

Yours truly,

Company

Per

THE MANITOBA WATER SERVICES BOARD

CONTRACT NO. M.W.S.B. 1398

**PRAIRIE VIEW MUNICIPALITY
TOWN OF BIRTLE**

CONTRACT 1: RAW WATER PIPELINE

ADDENDUM NO. 1

To the tender documents for the Prairie View Municipality, Town of Birtle, Contract 1: Raw Water Pipeline

September 11, 2017

PRECEDENCE

This addendum forms an integral part of the specifications describing all aspects of the work and is to be read in conjunction therewith.

SCOPE

The purpose of this addendum is to amend the following sections of the Tender Documents:

1.1 REVISED FORM NO. MWSB 3A & MWSB 3B

- .1 Use the revised Tender Form and Schedule of Quantities and Prices included with this addendum.

1.2 WATERWAY CROSSINGS

- .1 Additional waterway crossings to be confirmed onsite prior to installation at approximately the following locations:
 - .1 Drawing 4977-00-C-105, Plan #2, Station 3+450
 - .2 Drawing 4977-00-C-110, Plan #3, Station 9+375

1.3 BIRDTAIL RIVER VALLEY

- .1 Installation in the Birdtail River Valley shall be by trenchless installation methods **only**.
 - .1 Station 1+900 to Station 2+900
 - .2 Open excavation for pilot holes, relief holes, flushout installation, etc shall be permitted only where necessary and as agreed upon onsite between the Contractor and Engineer's inspector.

- .3 Where open excavations are permitted, Contractor shall follow the erosion control methods (silt fencing and erosion control blankets) as specified in MWSB Section 022010 - Construction of Waterways and AE Section 01 00 10 - Special Provisions.

1.4 SECTION 01 00 10 - SPECIAL PROVISIONS


- .1 Add the following clause 2.6
 - .1 PITLESS ADAPTOR
 - .1 Supply and install pitless units on the new well casings as shown.
 - .2 The unit shall be suited for installation on the well casing complete with reducing bushing, flange connection, spool, discharge body, hold down and lift mechanism, electrical conduit cable seal well vent and other accessories.
 - .3 Casing shall be steel complete with a corrosion resistant coating, or full stainless steel construction.
 - .4 Unit shall be rated for a maximum discharge pressure of 300 psi.
 - .5 Hold down mechanism/torque arrestor shall lock spools in place to prevent lifting and turning during pump start.
 - .6 NSF 61 approved, or equivalent.
 - .7 Approved Product:
 - .1 Monitor PS Series Industrial Pitless Unit,
 - .2 Boschart Industries IPS Industrial Pitless Unit, or
 - .3 Approved equal.

1.5 DRAWING 4977-00-C-102

- .1 Add the following table:

WELL PUMP INFORMATION		
WELL	RAW WATER WELL #1	RAW WATER WELL #2
EXISTING CASING SIZE	200 mm	200 mm
EXISTING CASING TYPE	PVC	PVC
PITLESS UNIT SIZE	200 mm (THIS CONTRACT)	200 mm (THIS CONTRACT)
WELL PUMP DROP PIPE SIZE:	BY OTHERS	BY OTHERS
TYPE:		
NEW PUMP	BY OTHERS	BY OTHERS

.2 Replace typical detail 4 with the following:

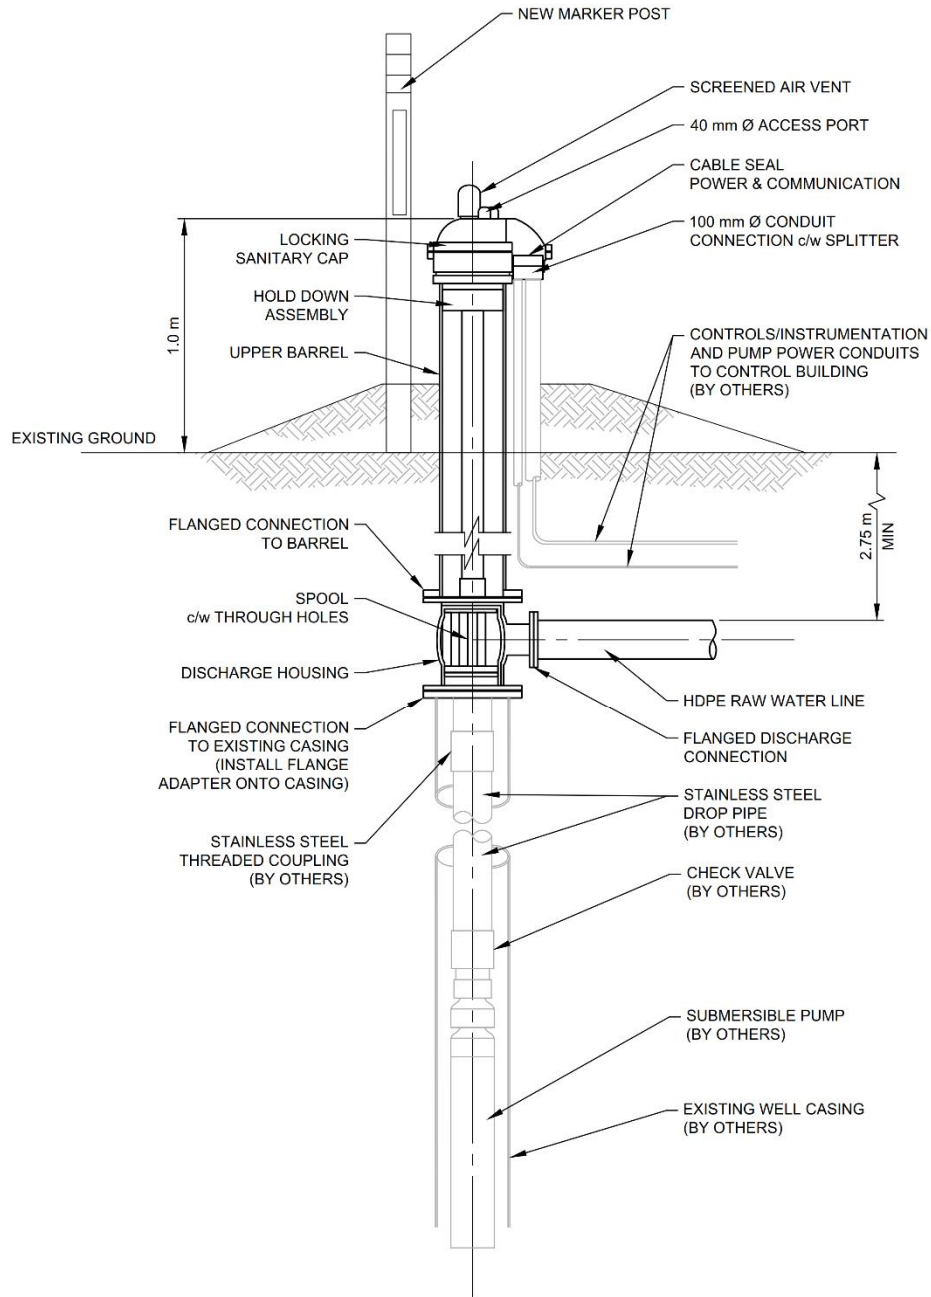

4 TYPICAL DETAIL 1:25
 WELL PUMP

END OF ADDENDUM #1

THE MANITOBA WATER SERVICES BOARD

TENDER FORM

Project No. MWSB 1398

Project Name Prairie View Municipality
Town of Birtle
Contract 1: Raw Water Pipeline

Submission Deadline Date: September 15, 2017
Time: Before 11:00 a.m. prevailing Brandon time

Bidder

Name of Bidder

Street

City Province Postal Code

*(mailing address if
different)*

Street or P.O. Box

City Province Postal Code

Contact Person The Bidder hereby authorizes the following contact person to represent the Bidder
for purposes of the Tender.

Contact Person Title

Telephone Number Facsimile Number

Email Address:

Definitions All capitalized terms used in the Contract shall have the meanings ascribed to them
in the General Conditions unless the context otherwise requires.

Offer The Bidder hereby offers to perform the Work in accordance with the
Contract for the price quoted by the Bidder, as set out in the Schedule of Prices.

Tender Documents The Bidder agrees that the Tender Documents in their entirety shall be deemed to be incorporated in and shall form a part of this Tender notwithstanding that not all parts are necessarily attached to or accompany these Tender Documents.

Time This Tender shall be open for acceptance, binding and irrevocable for a period of sixty (60) calendar days after the Submission Deadline.

Time to Complete the Work In accordance with GC:10 of the General Conditions, the Bidder agrees to achieve Substantial Performance:

For the 200 mm dia. pipeline option:
On or before March 2, 2018 and within 55 working days.

For the 250 mm dia. pipeline option:
On or before March 2, 2018 and within 60 working days.

Liquidated Damages In accordance with GC:10.6 of the General Conditions, the Bidder acknowledges and agrees that if it fails to achieve Substantial Performance in accordance with the dates specified in the Contract, the Bidder will be required to pay the MWSB the following amounts per Working Day as liquidated damages for each and every Working Day which the failure continues:

Liquidated Damages: **\$2,500** per working day.

Addenda The Bidder certifies that the following addenda have been received and agrees that they shall be deemed to form a part of the Contract:

No.	Dated
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____

Signatures In witness whereof the Bidder or the Bidder's authorized official or officials have signed this ____ day of _____, 20__.

_____(seal)
Signature of Bidder or Bidder's Authorized Official or Officials

(Print name and official capacity of individual whose signature appears above)

ACCEPTANCE

The MWSB hereby accepts the above Tender submitted by the Bidder,

_____ (hereinafter, called the “Contractor”) for
(insert legal name of Bidder)

Project No.: **1398**

Project Name: **Prairie View Municipality
Town of Birtle
Contract 1: Raw Water Pipeline**

Project Description: **Supply and install approximately 13.6 km of 200 mm diameter HDPE DR 11/17 pipe generally within the Prairie View Municipality. Includes installation of two new pitless adaptors on existing well casings.**

Name of Surety:

and agrees that such acceptance shall constitute the binding Contract between the MWSB and the Contractor for the Work.

The MWSB hereby confirms that the Contract Price for the Work is: \$_____.

FOR THE MANITOBA WATER SERVICES BOARD:

Dated this _____ day of _____, 20 ____.

Print Name and Title

Signature (seal)

**ALTERNATIVE 1
SCHEDULE OF PRICES
PROJECT NO. MWSB 1398**

Item No.	Description	Approx. Quantity	Unit	Unit Price \$0.00	Total Price \$0.00
1.0	<u>RAW WATER PIPELINE</u>				
<u>1.1</u>	<u>Pressure Pipeline</u>				
1.1.1	200 mm diameter HDPE DR17 Pipe	12,230	Lin. m.		
1.1.2	200 mm diameter HDPE DR11 Pipe	1,370	Lin. m.		
<u>1.2</u>	<u>Crossings</u>				
1.2.1	PRs & PTHs (encased)	1	Each		
1.2.2	Waterways	3	Each		
1.2.3	Birdtail River & Valley	1	Each		
<u>1.3</u>	<u>Gate Valve</u>				
1.3.1	200 mm	5	Each		
<u>1.4</u>	<u>Air/Vacuum Valve</u>				
1.4.1	Air/Vacuum Valve	3	Each		
<u>1.5</u>	<u>Flushout Assembly</u>				
1.5.1	200 mm Offline	4	Each		
1.5.2	200 mm End of Line	1	Each		
<u>1.5</u>	<u>Connections</u>				
1.5.1	Raw Water Well	2	Each		
<u>1.6</u>	<u>Bedding Sand</u>				
1.6.1	Bedding Sand	1000	m ³		
EXTRA WORK ALLOWANCE					\$150,000.00
				Sub-total	
*PST must be included in unit prices.				GST (5%)	
TOTAL TENDER PRICE					

Name of Bidder

**ALTERNATIVE 2
SCHEDULE OF PRICES
PROJECT NO. MWSB 1398**

Item No.	Description	Approx. Quantity	Unit	Unit Price \$0.00	Total Price \$0.00
2.0	<u>RAW WATER PIPELINE</u>				
<u>2.1</u>	<u>Pressure Pipeline</u>				
2.1.1	250 mm diameter HDPE DR17 Pipe	12,230	Lin. m.		
2.1.2	250 mm diameter HDPE DR11 Pipe	1,370	Lin. m.		
<u>2.2</u>	<u>Crossings</u>				
2.2.1	PRs & PTHs (w/ 350 mm dia. encasement pipe)	1	Each		
2.2.2	Waterways	3	Each		
2.2.3	Birdtail River & Valley	1	Each		
<u>2.3</u>	<u>Gate Valve</u>				
2.3.1	250 mm	5	Each		
<u>2.4</u>	<u>Air/Vacuum Valve</u>				
1.4.1	Air/Vacuum Valve	3	Each		
<u>1.5</u>	<u>Flushout Assembly</u>				
1.5.1	250 mm Offline	4	Each		
1.5.2	250 mm End of Line	1	Each		
<u>1.5</u>	<u>Connections</u>				
1.5.1	Raw Water Well	2	Each		
<u>1.6</u>	<u>Bedding Sand</u>				
1.6.1	Bedding Sand	1000	m ³		
EXTRA WORK ALLOWANCE					\$150,000.00
				Sub-total	
*PST must be included in unit prices.				GST (5%)	
TOTAL TENDER PRICE					

Name of Bidder